

Safety Checklist after first assembly


- **Test intervals of Safety: 6 months**
- **Test Component and contents:**
 1. Removing the reticulated system:
 - Check of removing condition each rope
 - Screwing the turn buckle and conversion the turnbuckle ass in anchors plate(see for this workstep turnbuckle ass
 2. Abrasion condition of rope:
 - Checking of all rope surface
 - Strengthened of rope: Coating on the surface
 3. Attachment condition of the anchors plate and turnl
 4. Screwing condition of all bolt
 5. Galvanizing condition of the steel component:
 - Protection of steel component from corrosion.

● **Measure**

In case of the appearance the defect detail is repaired usually within 3 days after checking.

GSWEB PLAYGROUND EQUIPMENT

1046-3, Najeon-ri, Saengnim-myeon,
Gimhae-si Gyeongsangnam-do,
621-821, Republic Of Korea
Tel) +82. 55. 326. 9096~7
Fax) +82. 55. 326. 9022
E-mail) gswebinfo@chol.com
Web site) www.gsweb21.com

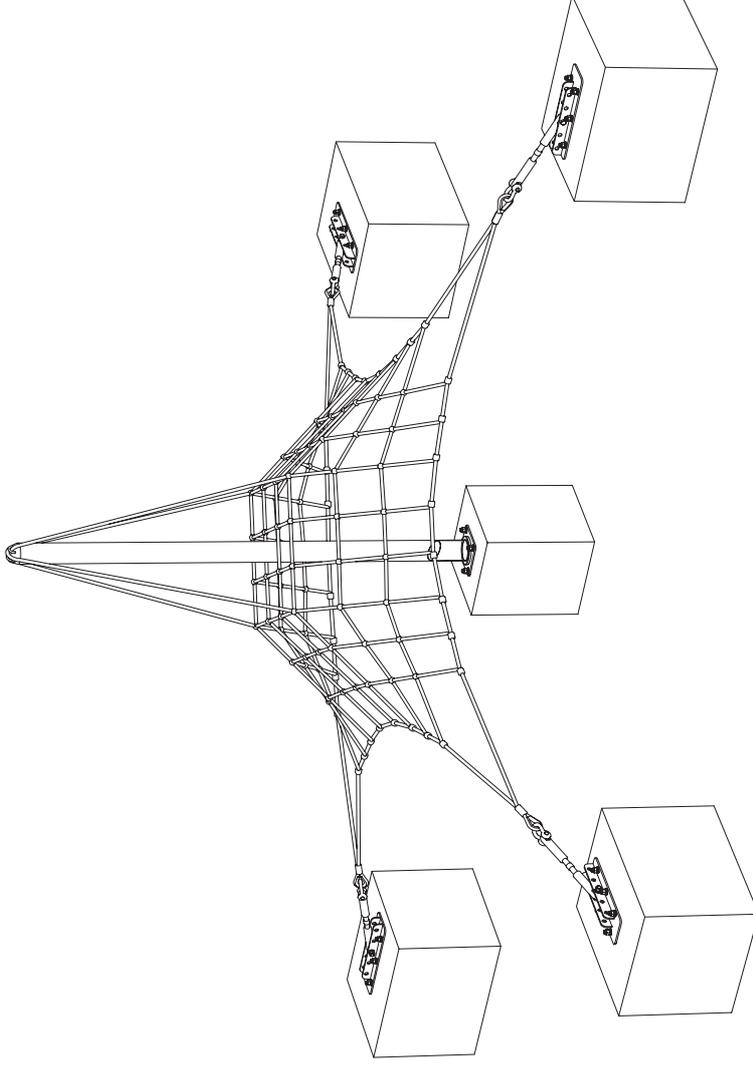

Features

The series was designed with little hands in mind. We have constructed each climber using the same quality materials and workmanship featured in every GS Web play net. Designed specifically for Children ages 2-5, now even they can enjoy the same thrilling play experience on a little playground designed for their big imaginations, but safe enough for their little hands and feet.

Ages: 2 to 6 years
Capacity: 10 children
Size: L: 14' 4" / 4.38m
W: 14' 4" / 4.38m
H: 8' 10" / 2.70m
Use zone: L: 24' 3" / 7.38m
W: 24' 3" / 7.38m

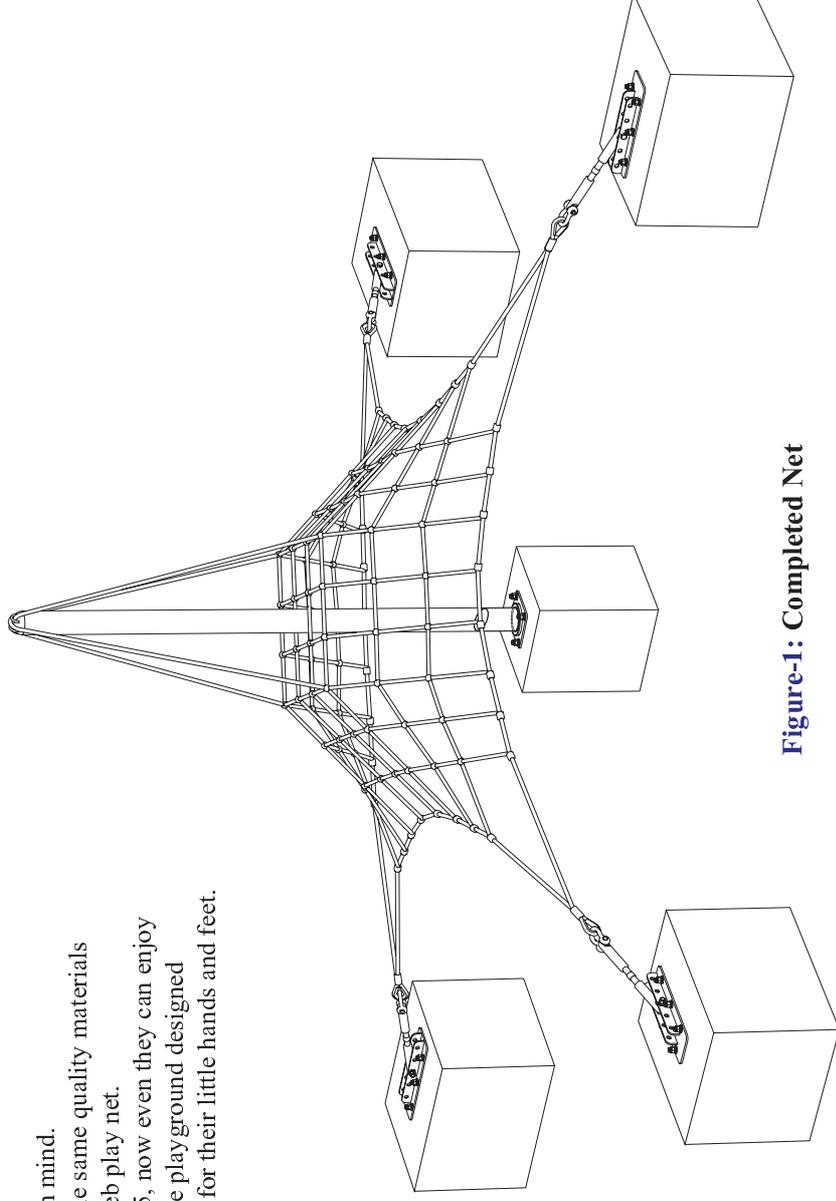


Figure-1: Completed Net

Safety area

The requirements for space and safety clearances are taken from BS-EN 1176-1/ ASTM-F1487/ CSA Z614
 The use zone for stationary play equipment shall extend no less than 72 in.(1830mm) from all sides of the play structure.

Fall Height : (a) 4' 11" / 1500mm (from surface)

The Fall height on the external surface of a pyramid shaped space net is the highest point attainable within a horizontal distance of **(b) 44" / 1100mm** from the edge of the structure where a free fall to the protective surface is possible. This distance is based on the centre of gravity height of the maximum user.

Imperial/Metric conversion

- 6' = 1830mm
- 10' 2" = 3100mm
- 32' 4" = 9860mm

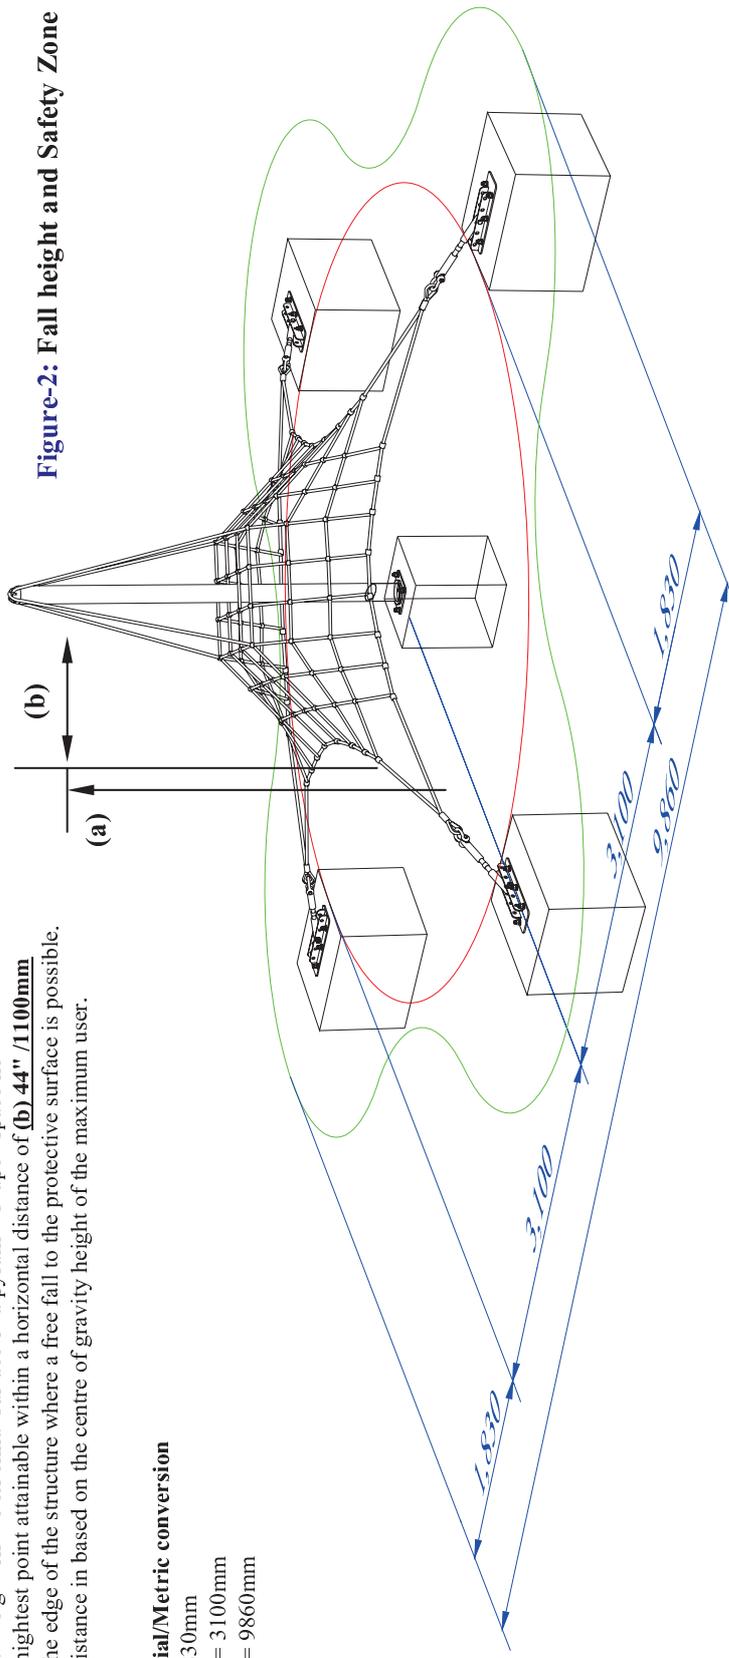


Figure-2: Fall height and Safety Zone

Foundation

Please refer to GS-Ws02 drawing for exact installation dimensions

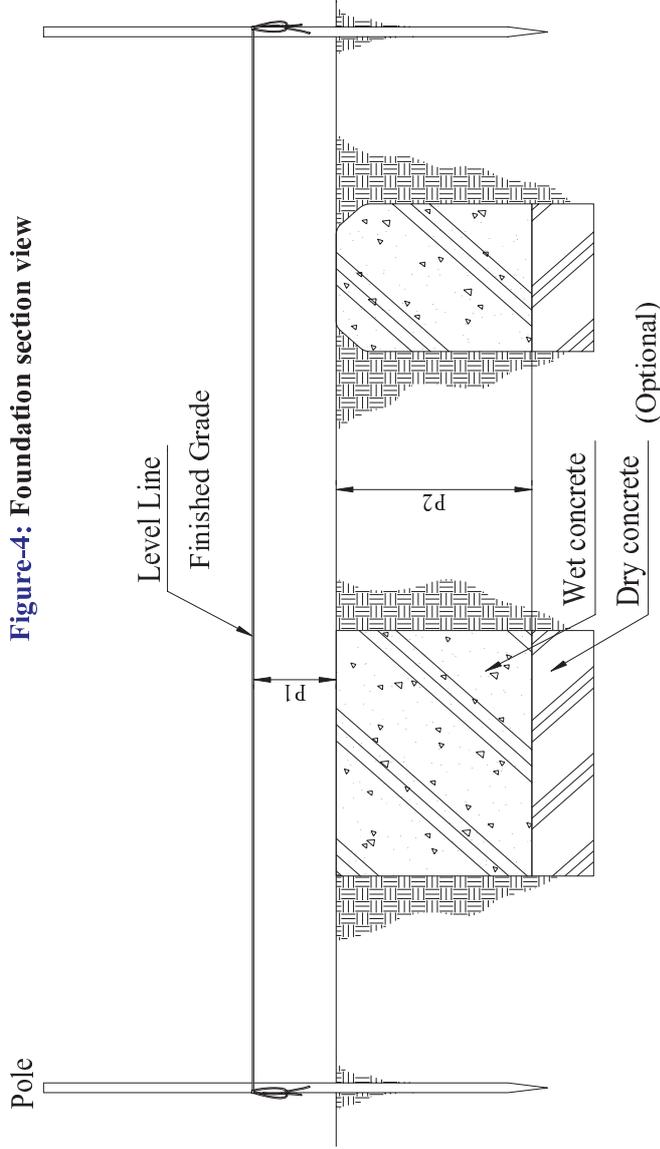


Figure-4: Foundation section view

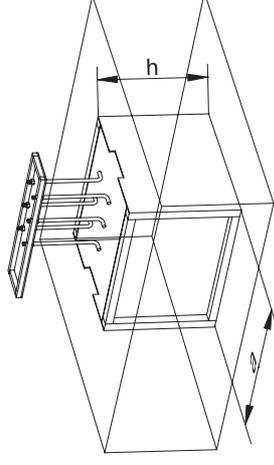



Figure-3: Excavate enough materials to allow for proper depth of concrete footings

Also ensure that there is enough space to allow the frame to be positioned properly.

Anchor wood support frame to ground with pickets to prevent the frame from moving while concrete is poured and sets.

P1 = Depth below finished Grade (12" / 300mm)
P2 = Depth of concrete footing (27-1/2" / 700mm)

Figure-5: Concrete footing and Anchor plate layout


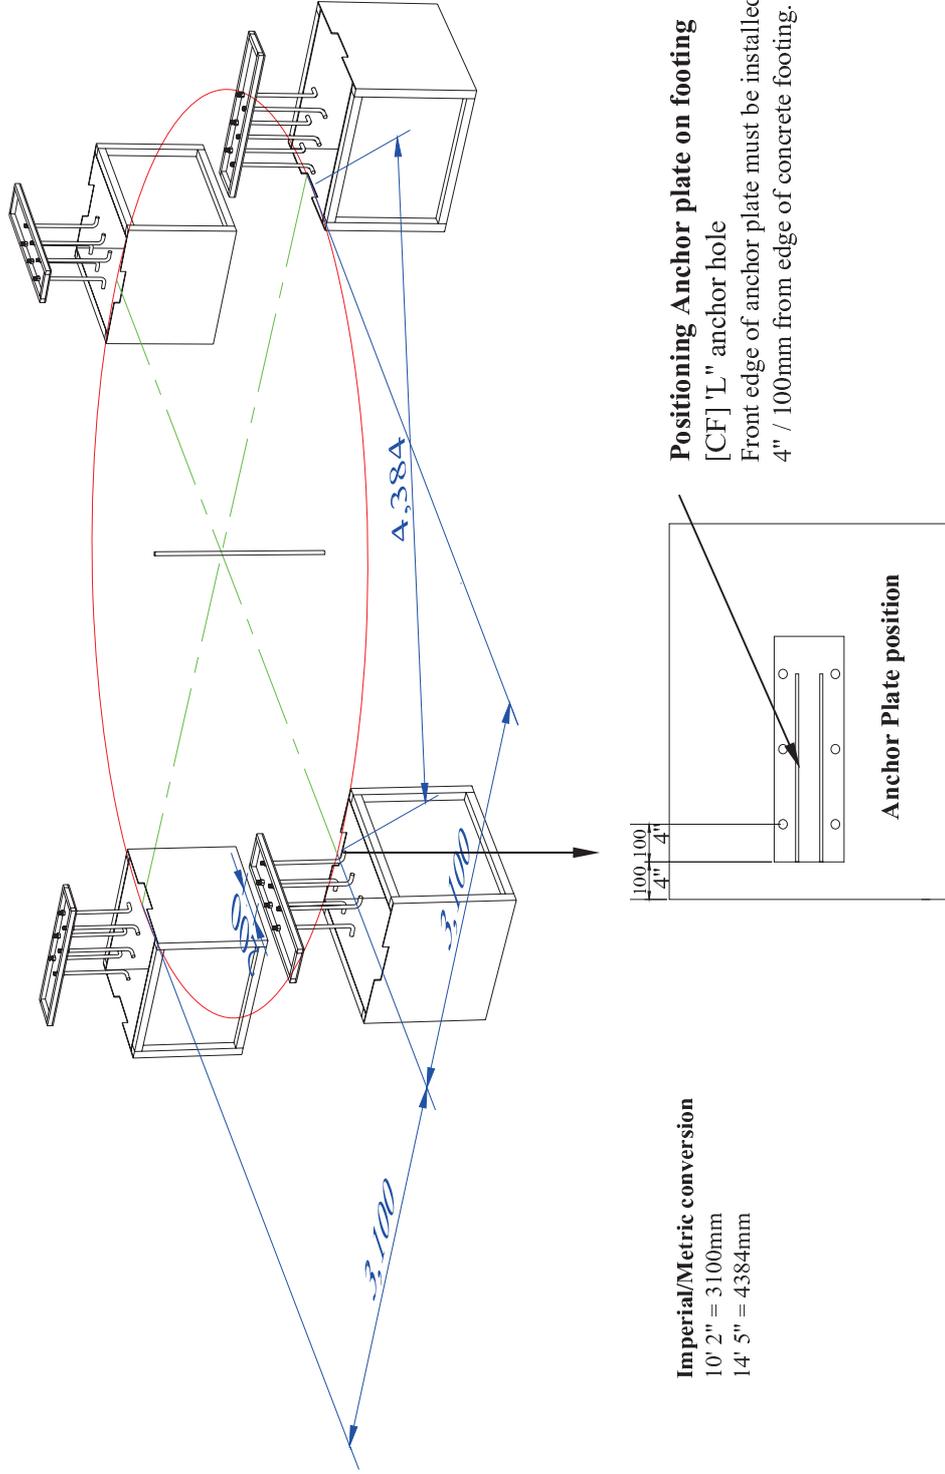


Assemble wooden support frames *

4 frames (39-1/2" / 1000mm L x 31-1/2" / 800mm W x 27-1/2" / 700mm H)

1 frame (24" / 600mm L x 24" / 600mm W x 27-1/2" / 700mm H)

*Use 1/2" (min) plywood; not included in package

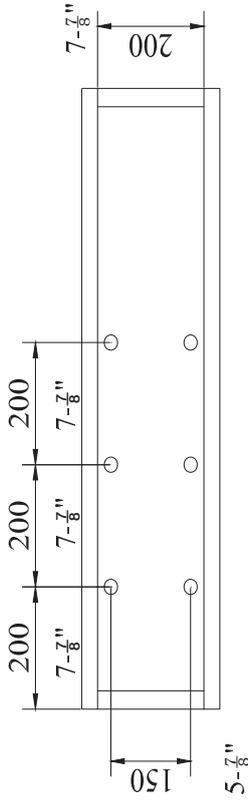

NOTE: Use anchor plate as guide for exact measurements.

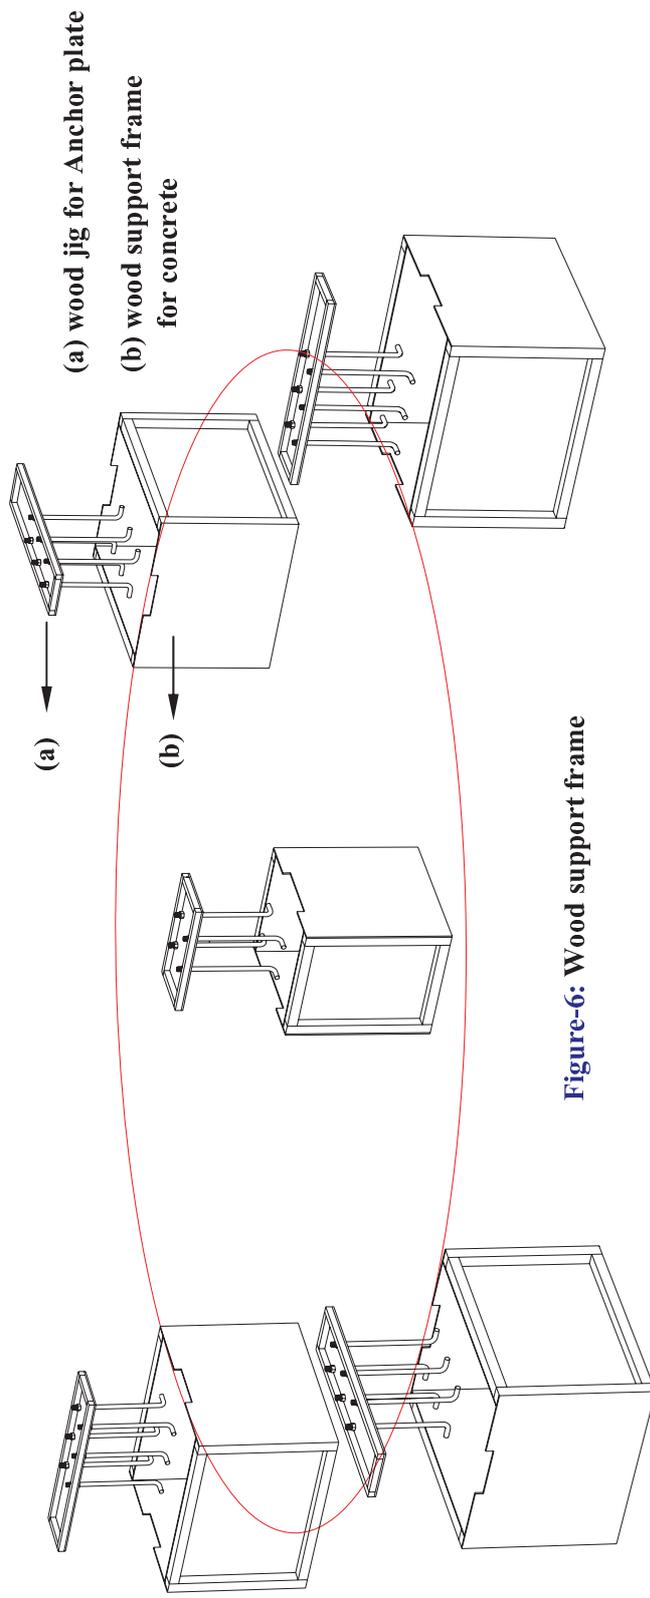


Figure-6: Wood support frame

[Concrete]

Pour concrete* into wooden support frame until flush to top edge
 Allow 3-5 days for concrete to cure before proceeding to next step.

*Concrete is to be wet concrete with minimum 25 MPA / 3500PSI.

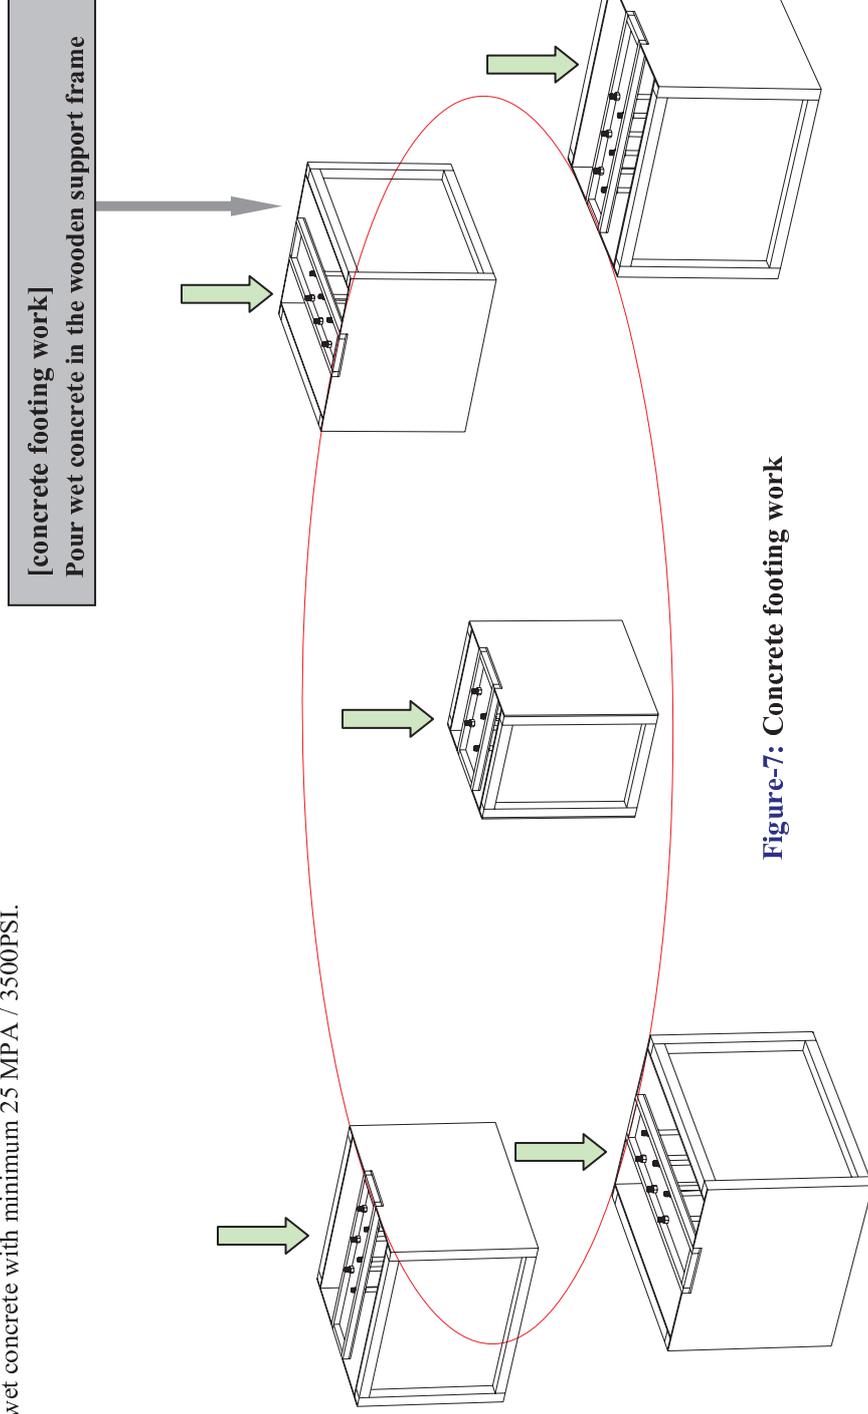


Figure-7: Concrete footing work

Remove wood support frame from dry concrete blocks

After concrete has cured enough, remove frame and replace soil in area around footing to subgrade level

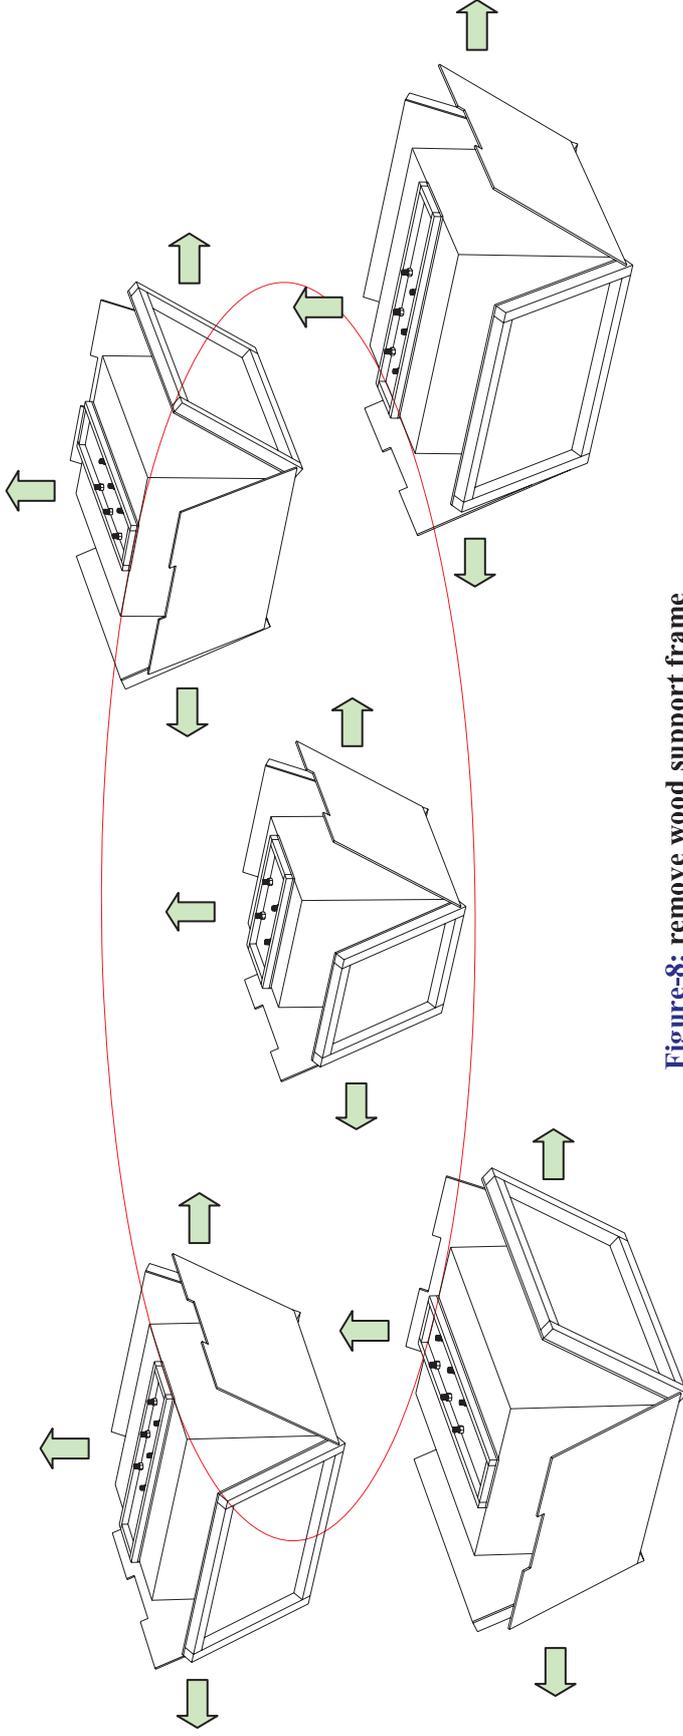


Figure-8: remove wood support frame

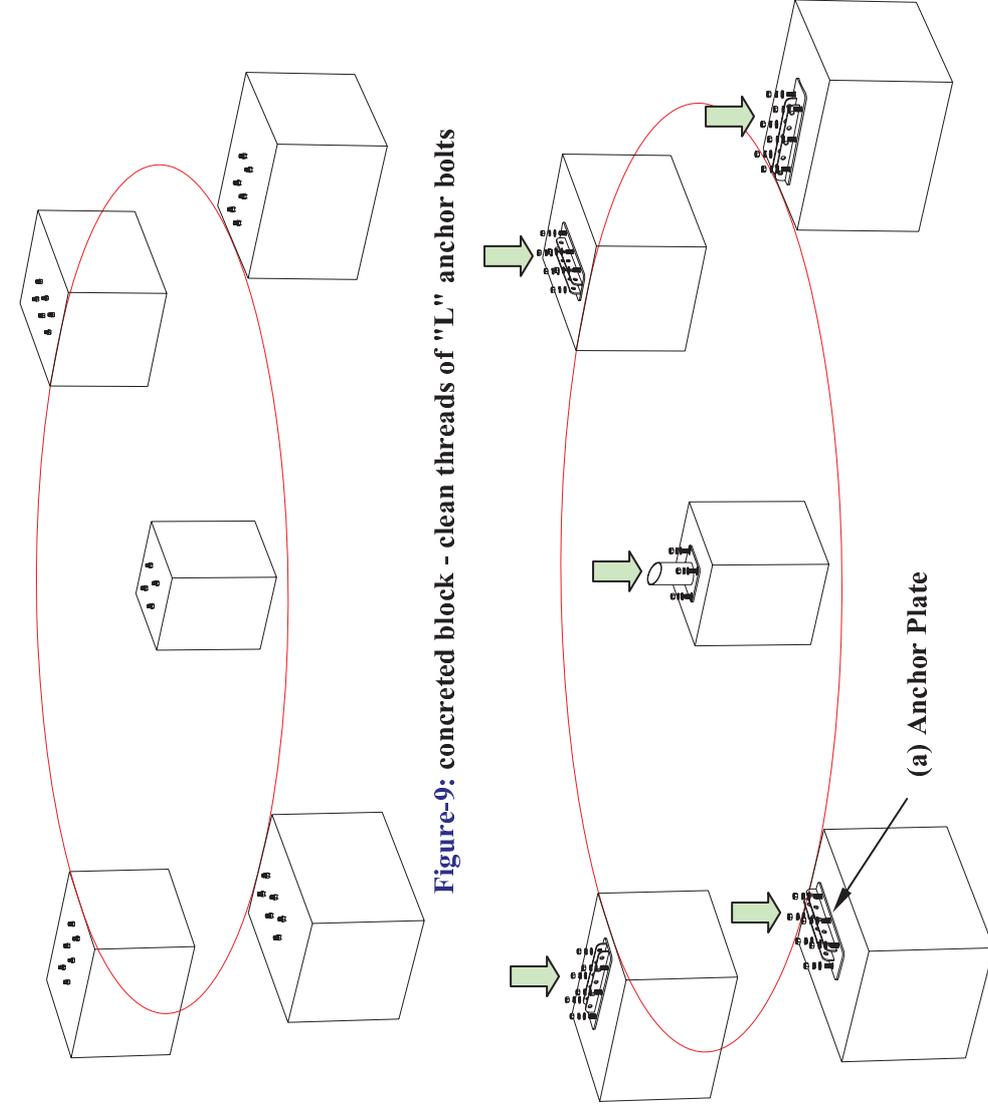


Figure-9: concreted block - clean threads of "L" anchor bolts


Figure-10: Attach Anchor plate to footing with flat washer, locking washer and nut.



(a) Anchor Plate




(b) Post plate

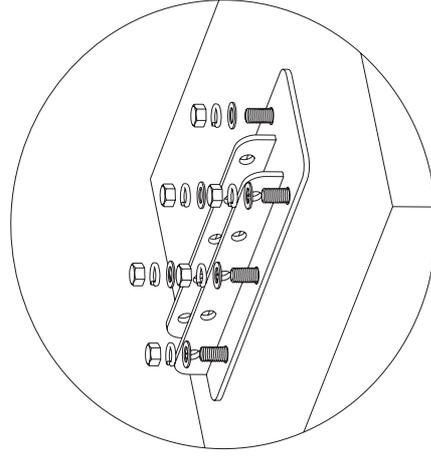


Post Assembly

Insert Post following nylon string

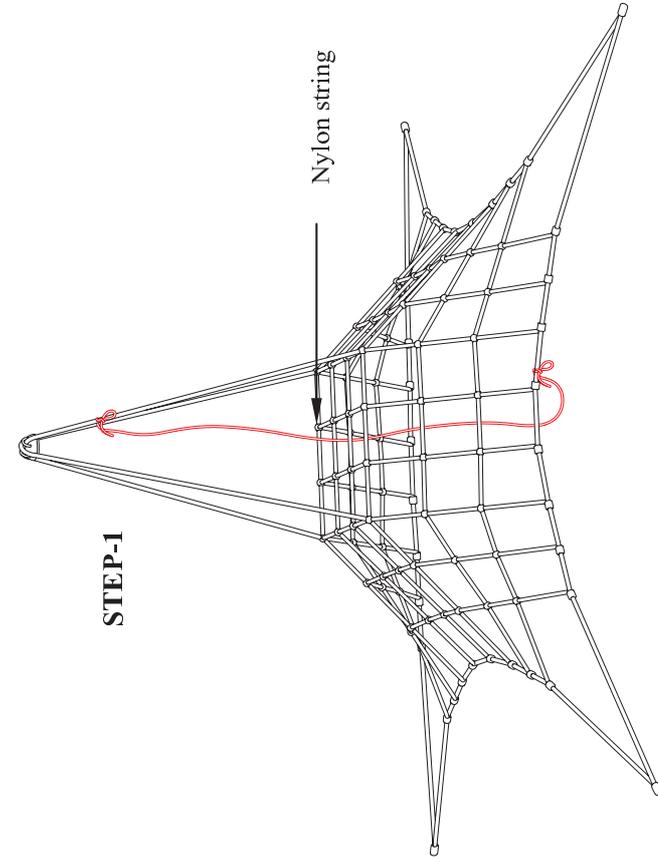

STEP-1

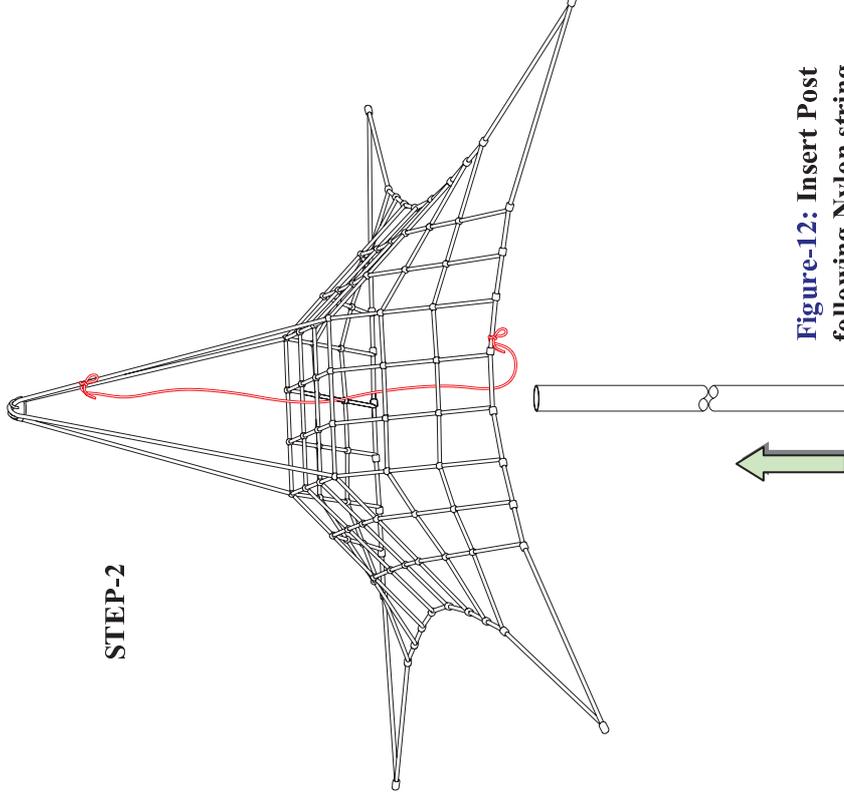


STEP-2

Figure-11: Find Nylon String

Figure-12: Insert Post following Nylon string


Place Cap on Post

Thread the mast through the net's center (per diagrams below, or following factory-installed guide string). Press the cap (already attached to the top of the net) into the mast's top end.

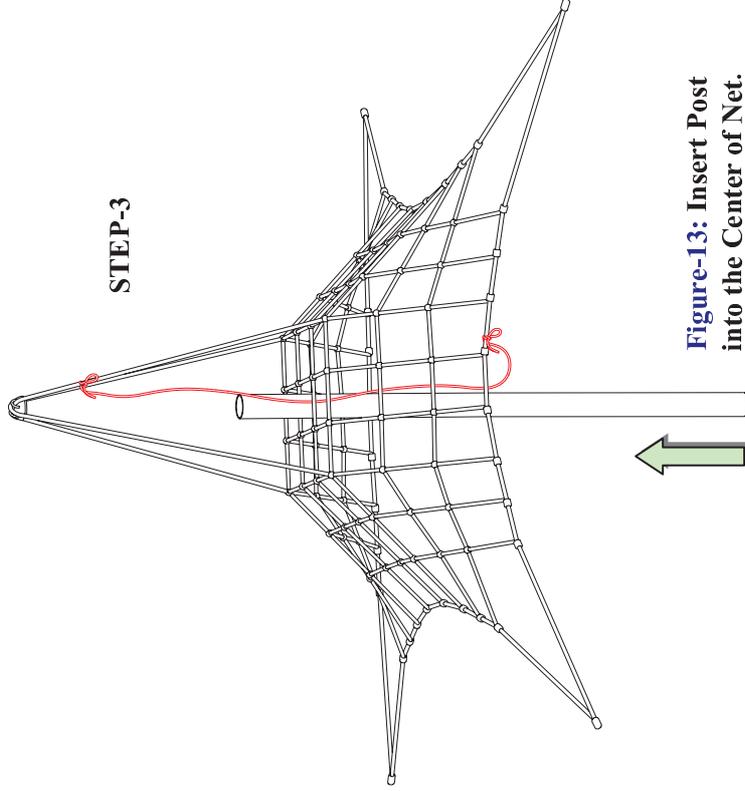

STEP-3

Figure-13: Insert Post into the Center of Net.

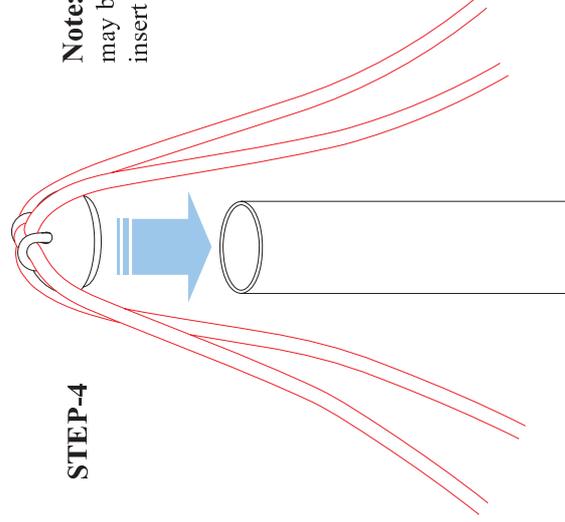

STEP-4

Note: Rubber mallet may be required to insert cap into post.

Figure-14: Post cap assembly.

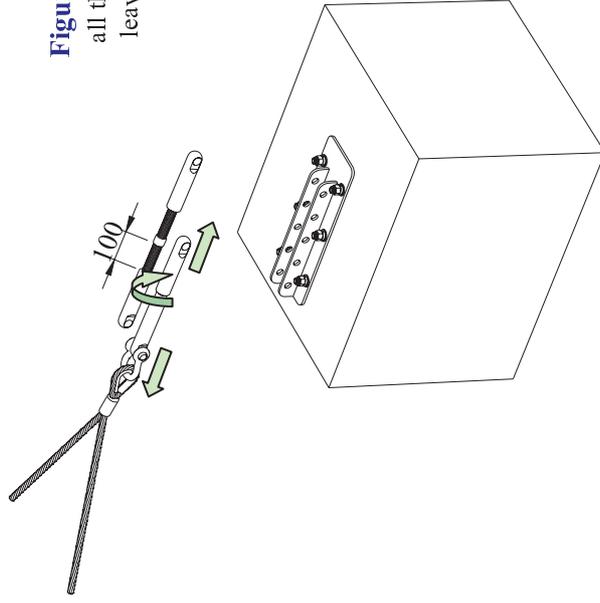


Figure-15: Loosen Turnbuckle:
all the way (about 100mm),
leaving only 4 or 5 threads attached

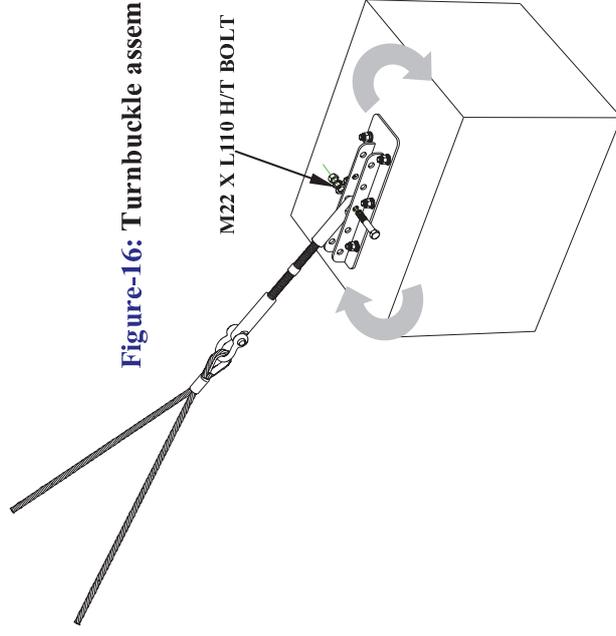


Figure-16: Turnbuckle assembly

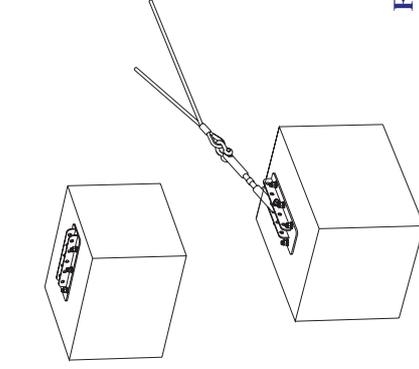


Figure-17: Main cables attached

It is strongly recommended that 3-4 workers lift the net into place.

[Working Process] (A) → (B) → (C) → (D) → (E)

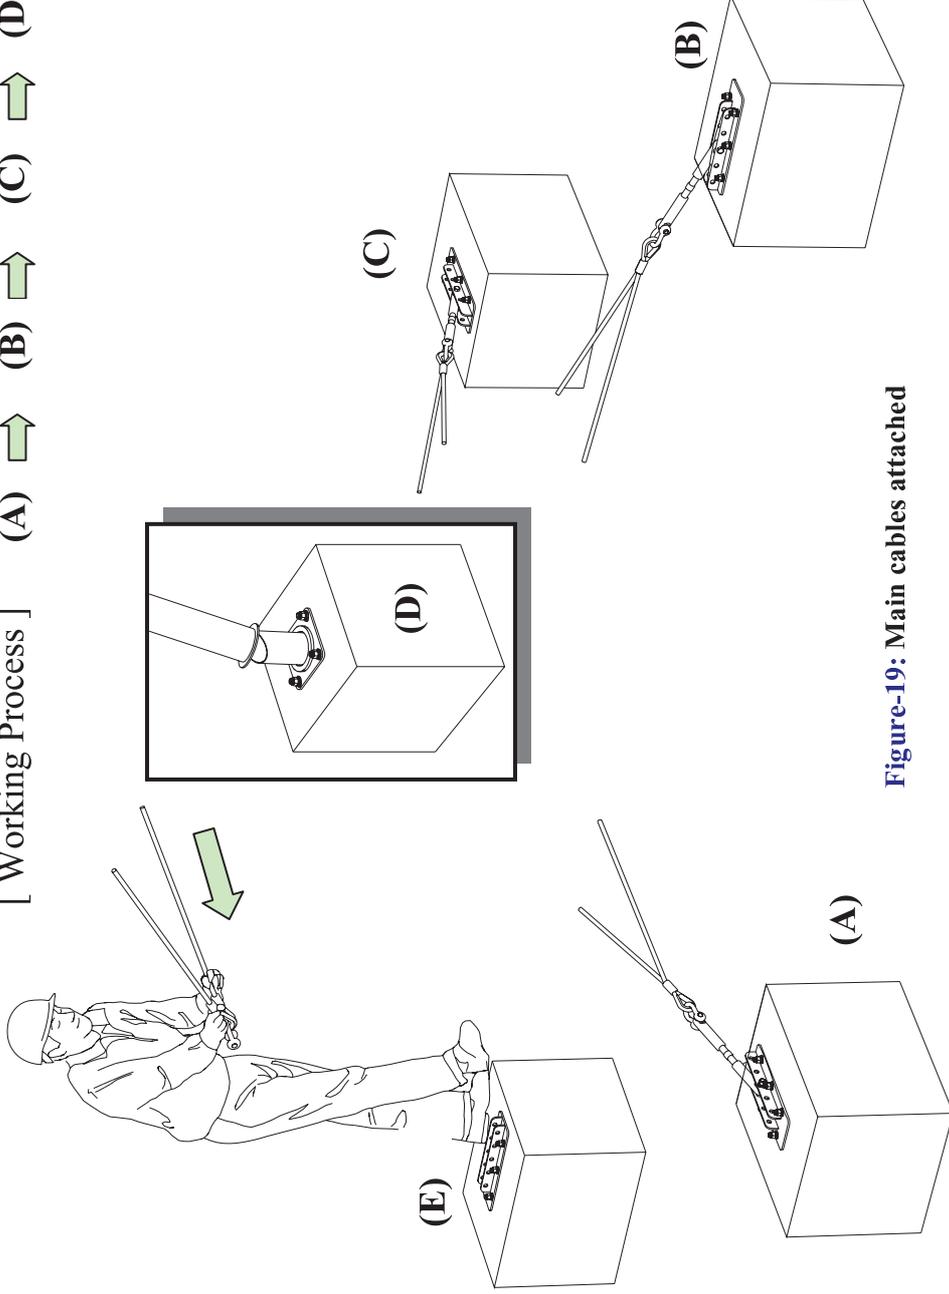


Figure-19: Main cables attached

After standing up the Net, Attach remaining Turnbuckles


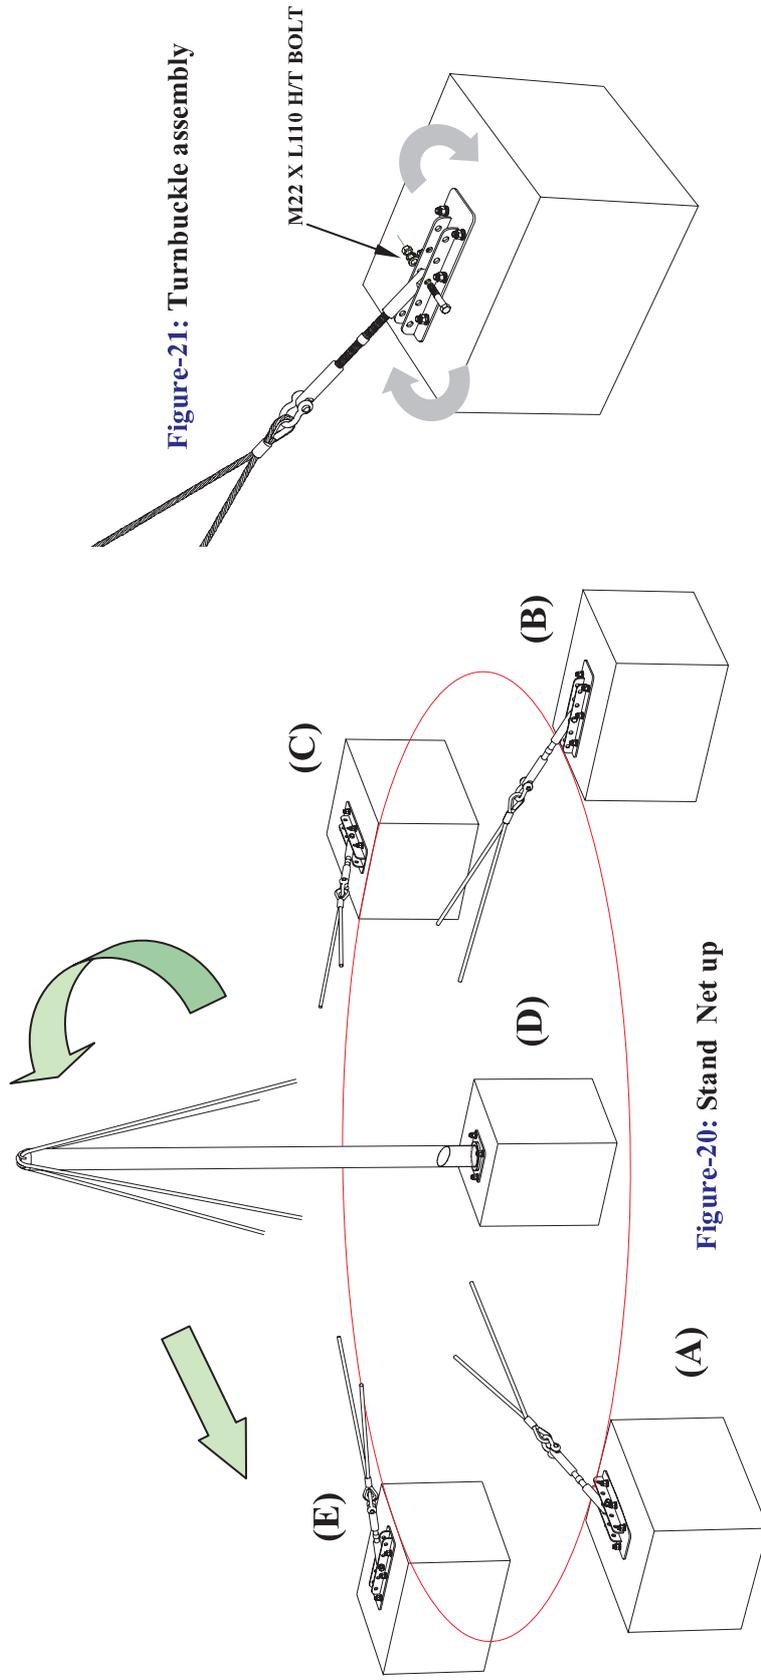


Figure-20: Stand Net up

(A) → (B) → (C) → (D) → (E)

Figure-21: Turnbuckle assembly

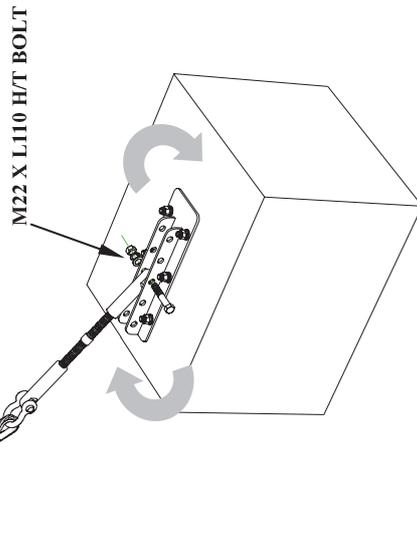

Anchor plate + Turnbuckle

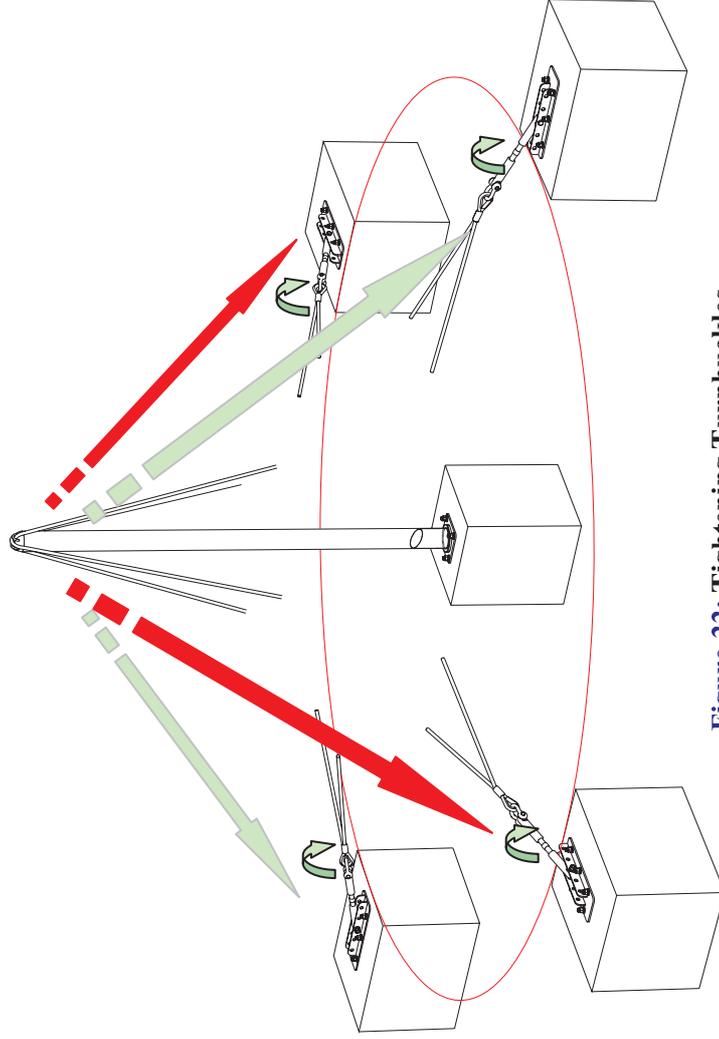


Figure-22: Tightening Turnbuckles

- (A)  Tighten Rope with Turnbuckles
- (B)  Tighten Rope with Turnbuckles

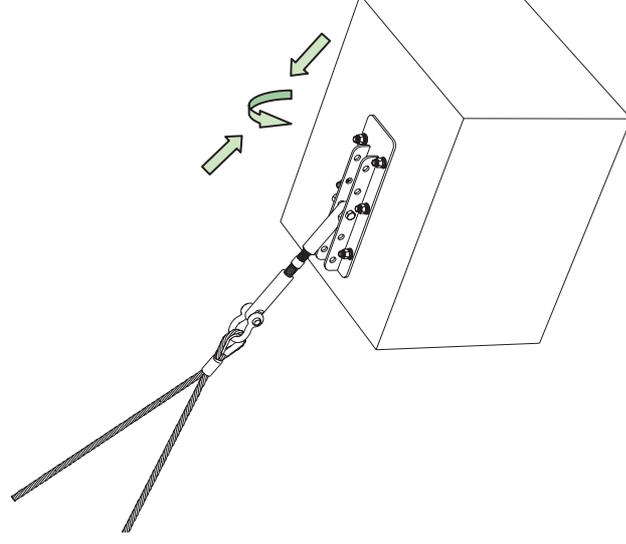


Figure-23: Turnbuckle assembly

Maintenance information

Please tighten rope with Turnbuckle properly.
If you strain the net too much, it may cause damage.
It is also recommended that subsequent checks on tension should be carried out at monthly intervals and adjusted as required.
This will increase the overall longevity of the product.

Checking: 1 month

Refer to IPEMA and TUV maintenance system.

After Net structure tension is completed, the net will stretch slightly over the first four weeks of use.
Following this initial period, the net needs to be fully re-tensioned by Turnbuckle after 1 year.


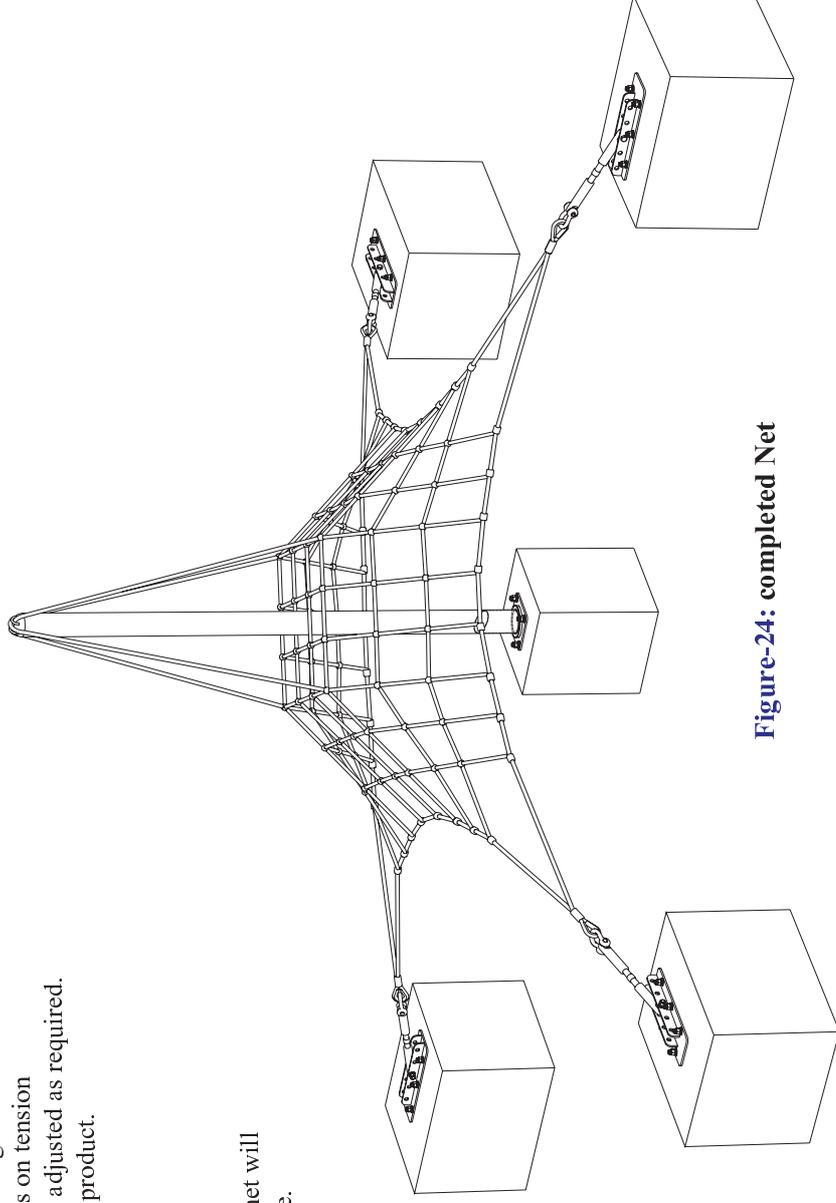


Figure-24: completed Net


**SINGLE MAST NET CLIMBER
PARTS LIST**

**MODEL NO.
GS-W502**

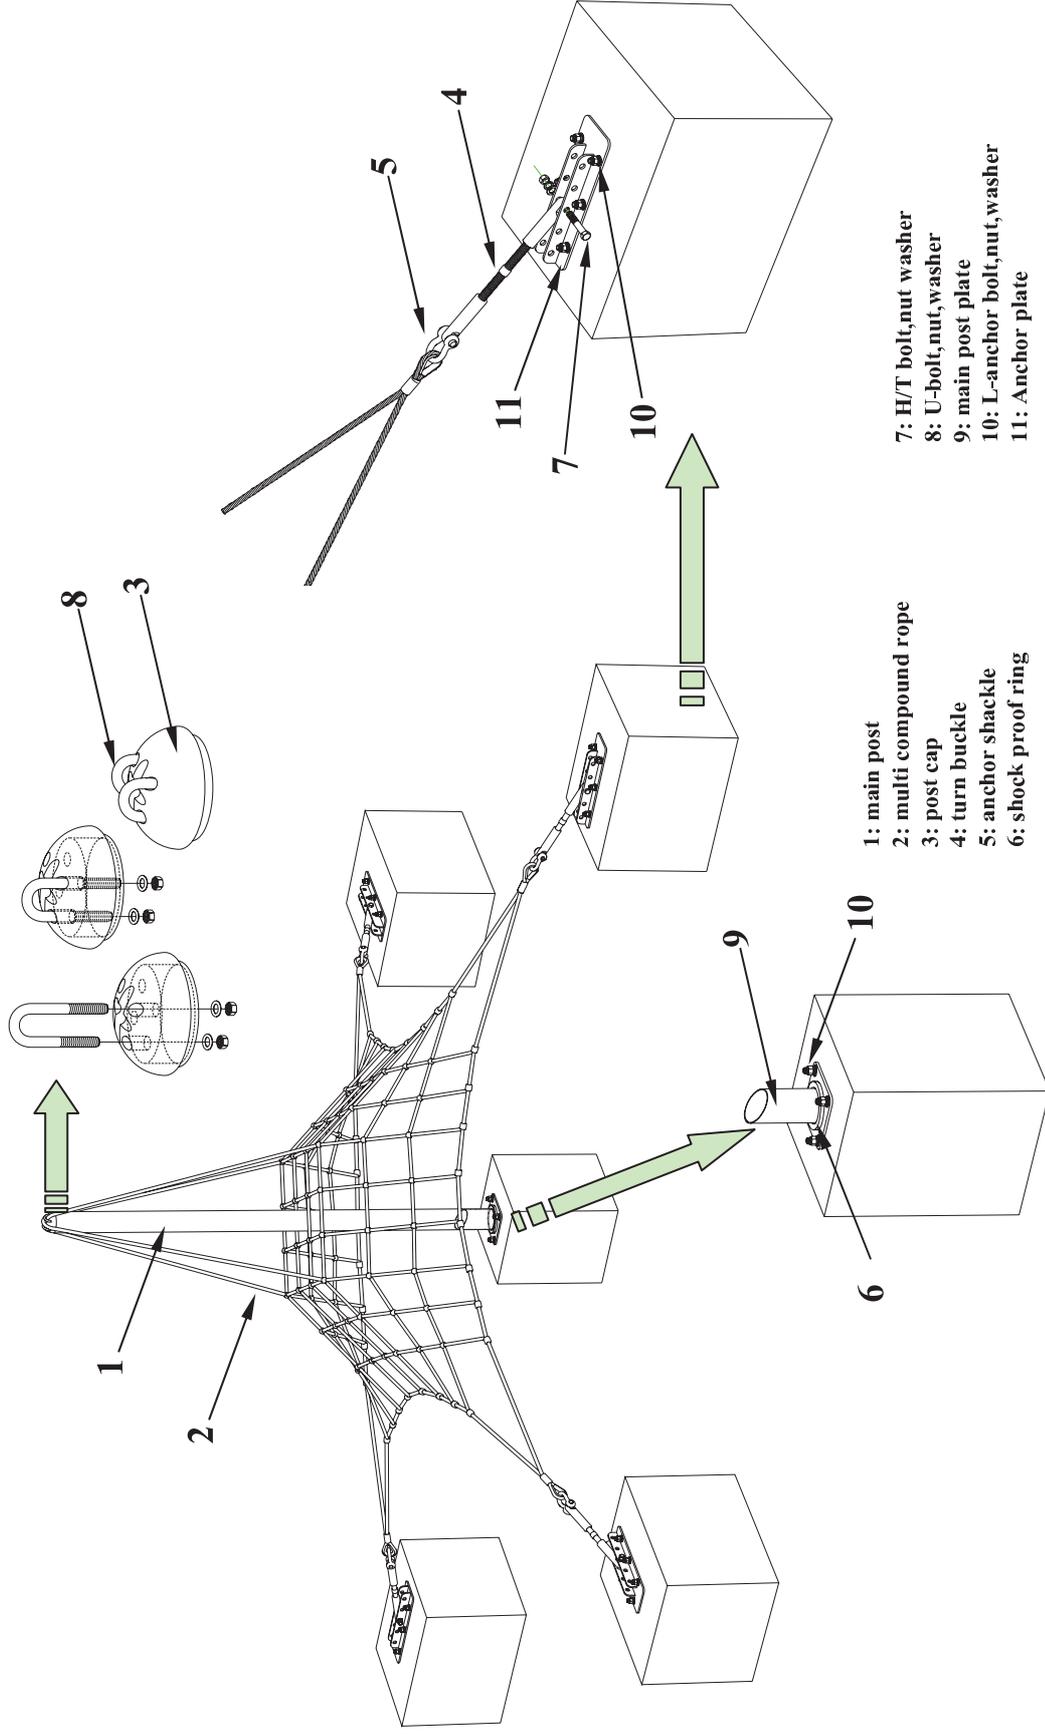

- 1: main post
- 2: multi compound rope
- 3: post cap
- 4: turn buckle
- 5: anchor shackle
- 6: shock proof ring
- 7: H/T bolt, nut, washer
- 8: U-bolt, nut, washer
- 9: main post plate
- 10: L-anchor bolt, nut, washer
- 11: Anchor plate

A weekly check of the activity net is recommended to ensure that no acts of vandalism have damaged the rope. Periodic checks on tension will assist in the durability of the product.

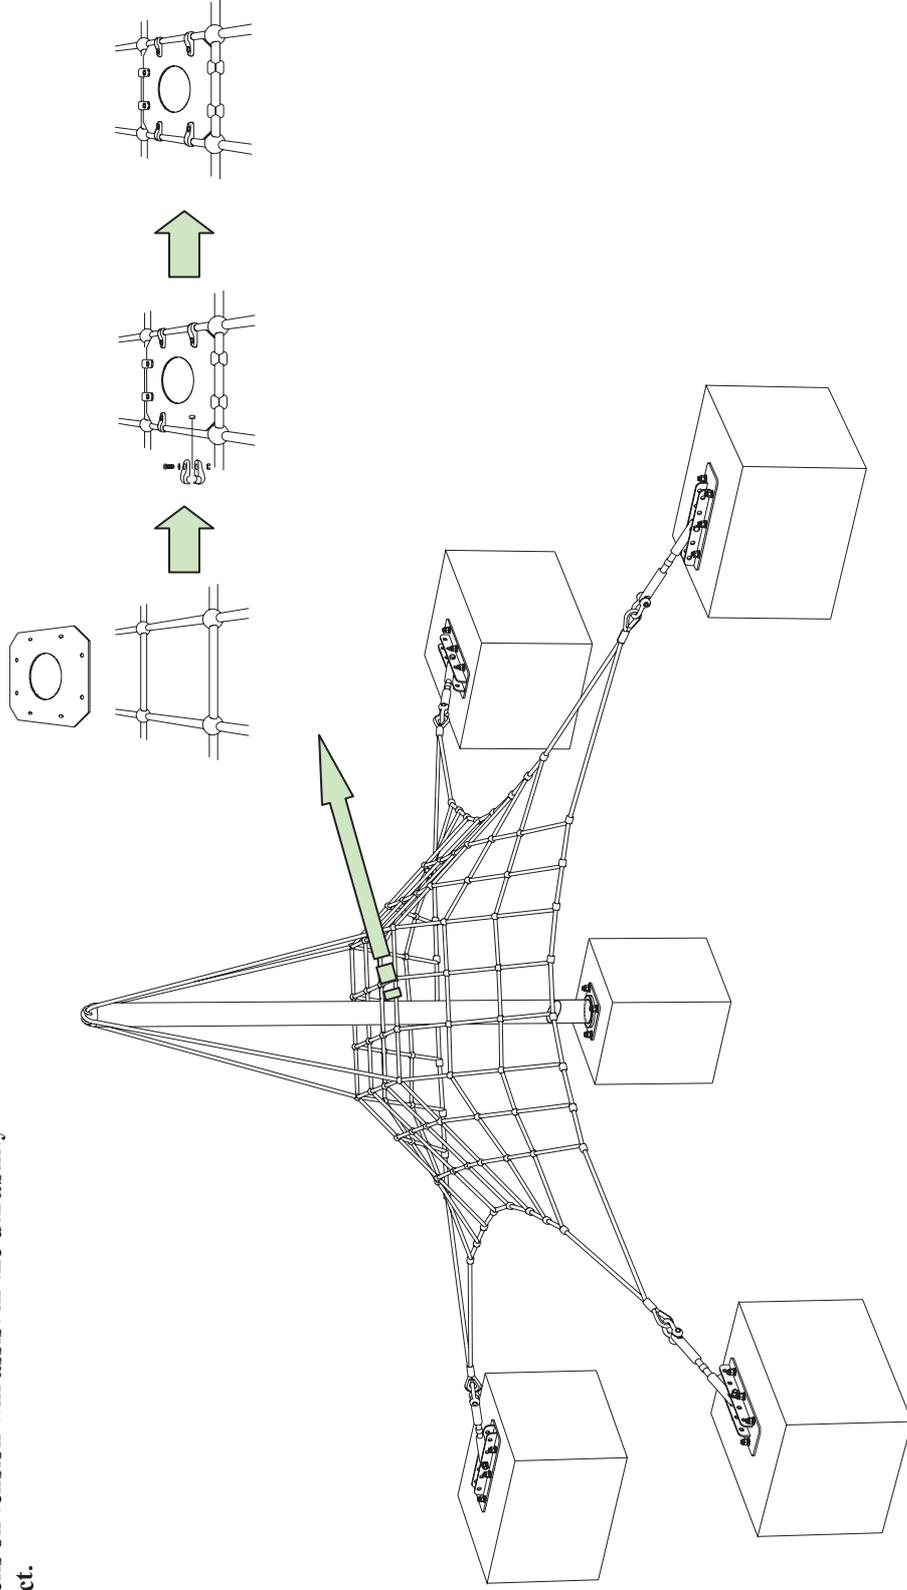

A. General safety measures

On the playground there should be a sign(pictogram) giving the following information:

- a) general emergency telephone number;
- b) telephone number to contact maintenance personnel;
- c) name of the playground;
- d) address of playground; and
- e) other relevant local information, if applicable.

The entry, exit and emergency paths to and from a playground, intended for use by the public and emergency services, should be accessible and free of obstacles at all times.

NOTE Attention is drawn to local regulations.

B. Procedures

Defects that occur during operation and which put safety at risk should be corrected without delay. If this is not possible, the equipment should be secured against use e.g. by immobilization or removal.

There should be written operational procedures covering the measures to be taken in the event of accidents, fire and the like.

Until unsafe equipment is repaired and released for use, access by the public should be prevented. Information about accidents brought to the attention of the manager should be recorded on a form that includes the following details:

- a) date and time of accident;
- b) age and sex of victim and clothing worn, Including footwear;
- c) equipment involved;
- d) number of children on site at the time of the accident;
- e) description of accident;
- f) injury sustained including part(s) of body affected;
- g) action taken;
- h) witness statements;
- i) any subsequent equipment modification;
- j) weather conditions; and
- k) any other relevant information.

C. Routine maintenance

To reduce accidents, the owner or operator should ensure that an appropriate routine maintenance schedule is established, implemented and maintained. This should take into account local conditions and the manufacturer's instructions that can affect the necessary inspection frequency. The schedule should list the components to be maintained and should also give procedures for dealing with complaints and breakdowns.

The routine maintenance of playground equipment and surfaces should consist of preventative measures to maintain their level of safety, performance and compliance with the relevant part(s) of EN 1176. Such measures should include:

- a) tightening of fastenings;
- b) re-painting and re-treatment of surfaces;
- c) maintenance of any impact attenuating surfaces;
- d) lubrication of bearings;
- e) marking of equipment to signify loose fill finished surface level;
- f) cleanings;
- g) removal of broken glass and other debris or contaminants;
- h) restoring loose fills to the correct level; and
- i) maintenance of free space areas.

D. Corrective maintenance

Corrective maintenance should include measures to correct defects, or to re-establish the necessary levels of safety of the playground equipment and surfaces. Such measures should include:

- a) replacement of fastenings;
- b) welding of welding repairs;
- c) replacement of worn or defective parts; and
- d) replacement of defective structural components.

E. Personal safety

Repairs during operation that could put the safety of maintenance personnel of the public at risk, should be avoided.

F. Equipment alterations

Alterations to parts of a piece of equipment or structure that could affect the essential safety of the equipment should only be carried out after consultation with the manufacturer or a competent person.